



LLOYD INDUSTRIES INC.

WWW.FIREDAMPER.COM

CEILING RADIATION DAMPER



MODEL:
45-LT

APPLICATION

The CRD-45-LT has been UL tested and labeled for protection of ceiling openings in fire rated floor/ceiling assemblies with fire resistance ratings of 3 hours or less. This product can also be applied to steel lay-in style ceiling diffusers up to 14"x14" maximum size. The damper is UL fire rated Ceiling/Floor and Ceiling/Roof Assembly L-558, L562, L563, L574, L585, P533, P544, P545 and P-547.

RATING:

UL CLASSIFIED:

UL 555C Fire Resistance Rating

Fire resistance rated 3 Hours

Building materials rated 3 Hours or less

Standard Construction


1. UL listed link (165°F Standard)(Max 212°F)
2. Blades 22 (0.853mm) Ga. Galv. Steel
3. Roll-formed frame 22 (0.853mm) ga. Galv. Steel
4. Steel duct drop (by others).

Model CRD 45-LT meets the requirements for fire dampers established by:


CSFM California State Fire Marshal
Fire Damper Listing (#3225-1417:101)



	Single Section	
	Width	Height
Minimum	4"	4"
Maximum	14"	14"

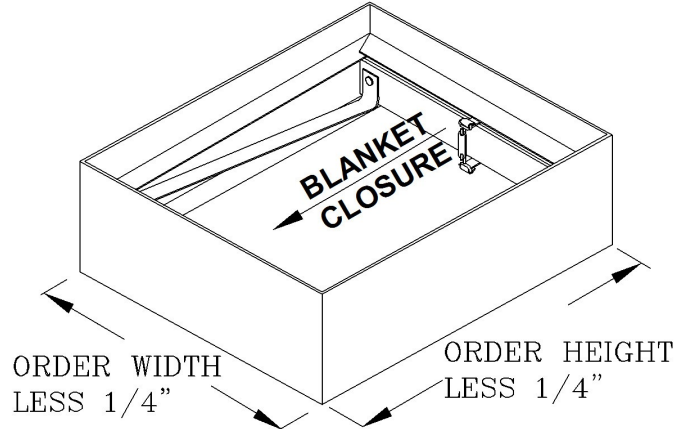

Model 45-LT

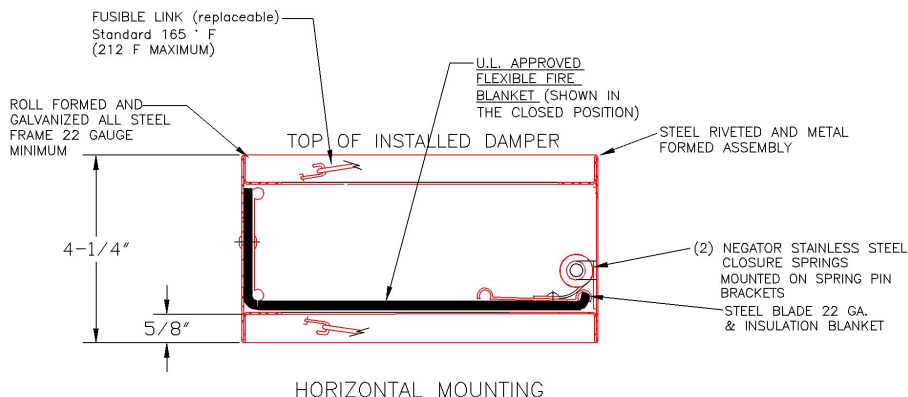

*ALL STATED SPECIFICATIONS ARE SUBJECT TO UPDATE WITHOUT NOTICE OR OBLIGATION.



WebREPS
800-810-3280