LLOYD INDUSTRIES INC.

WWW.FIREDAMPER.COM

CEILING RADIATION DAMPER
STANDARD SIDE-OUTLET BOOT FOR REGISTER BOX ASM.

MODEL:
CRD-50-96-BT
CRD-50-EA-96-BT

APPLICATION

CRD-50-96-BT /CRD-50-EA-96-BT is an 3-Hour rated damper, end boot, and "CR" round collar assembly for 1-Hour rated partitions.

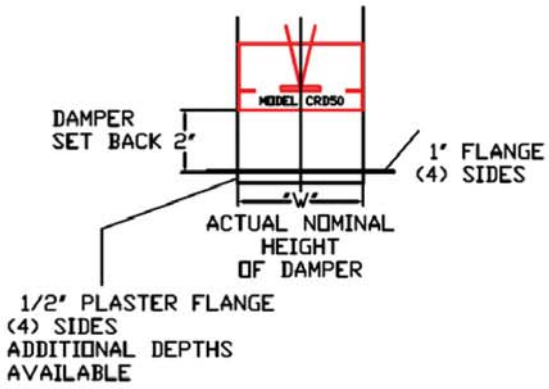

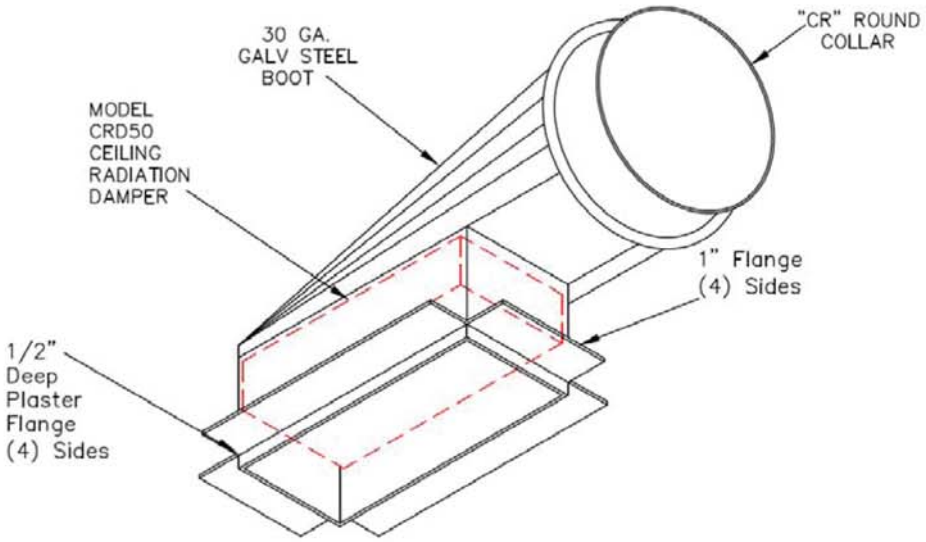

CEILING RADIATION DAMPER (UL 3-HOUR RATING)

- Fusible Link (165°F standard) (Optional temperatures available-212°F)
- Damper blades 22 gauge galvanized steel
- Roll formed frame 22 gauge galvanized steel
- Ceramic fiber with fiberglass cover (sizes over 80 SQ/IN)
- Rectangular W x H provided actual size for register installation

BOOT/ REGISTER BOX

- 30 Gauge galvanized steel
- Standard 1/2" deep plaster flange (additional depths are available)
- Standard 1" wide flanges (4) sides
- Round type "CR' collar. (provide nominal size)

FIBERGLASS INSULATION

- Exterior wrapped foil faced fiberglass R-6 insulation-Field installed
- 1-1/2" wide UL 181 aluminum duct tape

SIZE UNITS

Contact the factory for available W x H x Collar diameters

*ALL STATED SPECIFICATIONS ARE SUBJECT TO UPDATE WITHOUT NOTICE OR OBLIGATION.

WebREPS
800-810-3280